

全自动鞋底清洁机

AUTOMATIC SOLE
CLEANING MACHINE



苏州通特洁净系统科技有限公司

Suzhou Tongte Clean System Technology Co., Ltd.



服务
SERVE



性价比
COST-EFFECTIVE




专业
MAJOR



Company Profile 公司简介

苏州通特洁净系统科技有限公司，是一家集设计、研发、生产、销售、服务于一体的创新型技术企业，拥有研发设计工程师团队可以为您提供非标定制服务，主营产品：全自动鞋底清洗机，控制系统采用 PLC 集成控制系统可自定义设置进排水、增压冲洗沉淀物、人员通过时间，多重保护防止溢水；通特公司始终秉承“质量为先、信誉为本、客户至上、不断创新，与时俱进，放眼未来，用科技改变生活”的理念。公司产品广泛应用于光伏，新能源，光电，汽车，食品、化妆品等国际知名企业。


Suzhou Tongte Clean System Technology Co., LTD., is a set of design, research and development, production, sales, service in one of the innovative technology enterprises, with R & D design engineer team can provide you with non-standard customized services, the main products: Automatic sole cleaning machine, the control system adopts PLC integrated control system can customize the drainage, pressure washing sediment, personnel through time, multiple protection to prevent water overflow; Tongte company always adheres to the concept of "quality first, credit-based, customer first, continuous innovation, advancing with The Times, looking to the future, changing life with science and technology". The company's products are widely used in photovoltaic, new energy, photoelectric, automobile, food, cosmetics and other international well-known enterprises.



设计



服务



科技



售后

360° automatic sole cleaning machine 360°全自动鞋底清洗机


GT8-干刷式

GT8- Dry brush type

鞋底清洁机采用无水辊刷式设计，设备主体由SUS304不锈钢制成。人员通过清洗区时，人体感应触发电机带动辊刷对鞋底进行清洁，停留2秒即可有效清除鞋底附着的碳粉及粉尘颗粒物。鞋底机底部设有集尘收纳盒，定期集中清洁。360°鞋底滚刷适用于清洁纹路较深的无尘鞋、劳保靴、皮胶鞋类。



Sole cleaning machine adopts waterless roller brush design, the main body of the equipment is made of SUS304 stainless steel. When the personnel pass through the cleaning area, the human body induction triggered motor drives the roller brush to clean the sole, and the toner and dust particles attached to the sole can be effectively removed after staying for 2 seconds. The bottom of the sole machine is provided with a dust collection box for regular centralized cleaning. 360° sole rolling brush is suitable for cleaning dust-free shoes, labor protection boots, leather rubber shoes with deep lines.

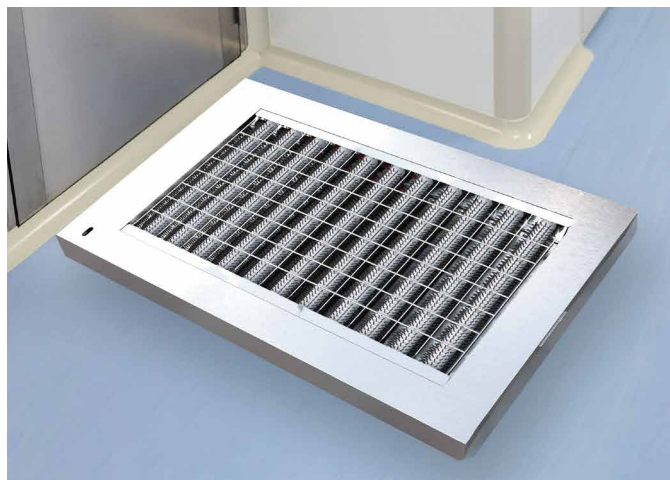

Product parameter

产品参数

内置（干刷鞋底机）参数

Built-in (dry sole brush machine) parameters

型号 model	GT8-850	GT8-1350	GT8-1850	GT8-2350	GT8-2850
外形尺寸 (mm) Overall dimensions (mm)	850*770*160	1350*770*160	1850*770*160	2350*770*160	2850*770*160
启动工作方式 Startup mode	人体感应 Human body induction				
电机功率 Motor power	200W	200W	200W	200W	200W
电机电压 Motor voltage	220V	220V	220V	220V	220V
毛屑收纳方式 Dandruff storage	集尘抽屉 Dust drawer				
安全防护 Safety protection	过载 / 漏电保护 Overload/leakage protection				
设备总功率 Total power of equipment	400w	400w	400w	400w	400w
主体材质 Body material	SUS3041.5mm、2.5mm、3.0mm				
设备供电 Equipment power supply	220V50Hz	220V50Hz	220V50Hz	220V50Hz	220V50Hz

外置（干刷鞋底机）参数

External (dry sole brush machine) parameters

型号 model	GT8-1000	GT8-1500	GT8-2000	GT8-2500	GT8-3000
外形尺寸 (mm) Overall dimensions (mm)	1000*770*160	1500*770*160	2000*770*160	2500*770*160	3000*770*160
启动工作方式 Startup mode	人体感应 Human body induction				
电机功率 Motor power	200W	200W	200W	200W	200W
电机电压 Motor voltage	220V	220V	220V	220V	220V
毛屑收纳方式 Dandruff storage	集尘抽屉 Dust drawer				
安全防护 Safety protection	过载 / 漏电保护 Overload/leakage protection				
设备总功率 Total power of equipment	400w	400w	400w	400w	400w
主体材质 Body material	SUS3041.5mm、2.5mm、3.0mm				
设备供电 Equipment power supply	220V50Hz	220V50Hz	220V50Hz	220V50Hz	220V50Hz

360° automatic sole cleaning machine

360°全自动鞋底清洗机

ST6-水洗式

ST6- Wash type

鞋底清洁机采用有水辊刷式设计，设备主体由 SUS304 不锈钢制成。人员通过清洗区，人体感应触发电机带动辊刷对鞋底进行清洁，停留 2-3 秒即可有效清除鞋底附着的灰尘颗粒及毛发，污水经现场地漏排走。增压泵强力冲洗表面沉淀物，节省人员手动清洁。PLC 集成控制系统，多重防溢水。



Sole cleaning machine adopts water roller brush design, the main body of the equipment is made of SUS304 stainless steel. Personnel through the cleaning area, the human body induction triggered motor to drive the roller brush to clean the soles, stay 2-3 seconds can effectively remove the dust particles and hair attached to the soles, and the sewage is discharged through the floor drain. The booster pump forcefully washes the surface sediment, saving personnel manual cleaning. PLC integrated control system, multiple overflow prevention.



Product parameter

产品参数

内置（水洗式鞋底机）参数

Built-in (washing sole machine) parameters

型号 model	ST6-850	ST6-1350	ST6-1850	ST6-2350	ST6-2850
外形尺寸 (mm) Overall dimensions (mm)	850*770*160	1350*770*160	1850*770*160	2350*770*160	2850*770*160
吸干区尺寸 Size of the drying zone		530*568	555*568	675*568	795*568
水洗区尺寸 Wash zone size		605*568	1080*568	1460*568	1840*568
PVA 吸水垫尺寸 PVA absorbent pad size		540*530*10	540*560*10	540*675*10	540*800*10
启动工作方式 Startup mode	人体感应 Human body induction				
水箱容积 Tank volume	10L	20L	20L	20L	30L
换水方式 Water change mode	手自一体 Manual automatic integration				
沉淀物清洗方式 Sediment cleaning method	/	/	增压泵 booster pump	增压泵 booster pump	增压泵 booster pump
电机功率 Motor power	200w	200W	200W	200W	200W
水泵功率 Pump power	140w	140W	140W	140W	140W
设备总功率 Total power of equipment	750w	750W	850W	850W	850W
安全防护 Safety protection	过载 / 漏电保护 Overload/leakage protection				
控制系统 Control system	PLC 集成控制 PLC integrated control				
主体材质 Body material	SUS304 1.5mm、2.5mm、3.0mm				
设备供电 Equipment power supply	220V50Hz	220V50Hz	220V50Hz	220V50Hz	220V50Hz

外置（水洗式鞋底机）参数

External (washing sole machine) parameters

型号 model	ST6-1000	ST6-1500	ST6-2000	ST6-2500	ST6-3000
外形尺寸 (mm) Overall dimensions (mm)	1000*770*160	1500*770*160	2000*770*160	2500*770*160	3000*770*160
吸干区尺寸 Size of the drying zone	465*568	585*568	610*568	730*568	945*568
水洗区尺寸 Wash zone size	320*568	700*568	1175*568	1555*568	1840*568
PVA 吸水垫尺寸 PVA absorbent pad size	540*465*10	540*585*10	540*610*10	540*730*10	540*945*10
启动工作方式 Startup mode	人体感应 Human body induction				
水箱容积 Tank volume	10L	20L	20L	20L	30L
换水方式 Water change mode	手自一体 Manual automatic integration				
沉淀物清洗方式 Sediment cleaning method	/	/	增压泵 booster pump	增压泵 booster pump	增压泵 booster pump
电机功率 Motor power	200w	200W	200W	200W	200W
水泵功率 Pump power	140w	140W	140W	140W	140W
设备总功率 Total power of equipment	750w	750W	850W	850W	850W
安全防护 Safety protection	过载 / 漏电保护 Overload/leakage protection				
控制系统 Control system	PLC 集成控制 PLC integrated control				
主体材质 Body material	SUS304 1.5mm、2.5mm、3.0mm				
设备供电 Equipment power supply	220V50Hz	220V50Hz	220V50Hz	220V50Hz	220V50Hz


Wheel cleaning system

车轮清洁系统

原理：车轮清洁地刷，分为水洗款式和干刷款式，安装在地面，一种有水和无水的高效车轮清洁方式。车轮只需要在清洁区域行驶 3 圈以上即可清洁车轮上 95% 的脏污适用于各种叉车车轮，如电动叉车、手动叉车、AGV 智能车、手推车的车轮清洁。



Principle: Wheel cleaning floor brush, divided into water washing style and dry brush style, installed on the ground, is an efficient wheel cleaning method with and without water. The wheels only need to drive more than 3 laps in the cleaning area to clean 95% of the dirt on the wheels. It is suitable for cleaning the wheels of various forklifts, such as electric forklifts, manual forklifts, AGV intelligent vehicles, and handcarts.

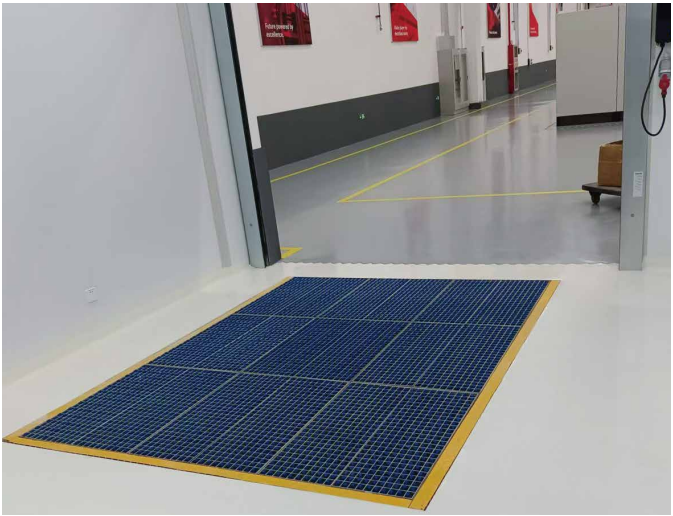

车轮清洁系统参数

Wheel cleaning system parameters

型号 model	CL9-50	GL9-50	GL9-50	GL9-50	CL9-50
外形尺寸 (mm) Dimensions (mm)	710*950*50	710*950*50	710*950*50	710*950*50	710*950*50
不锈钢模块 Stainless steel module	2 块 2 pieces	2 块 2 pieces	2 块 2 pieces	2 块 2 pieces	2 块 2 pieces
毛刷 Brush brush	20 条 20 items	20 条 20 items	20 条 20 items	20 条 20 items	20 条 20 items
毛屑收纳方式 Storage method for hair scraps	集尘盒 Dust box	集尘盒 Dust box	集尘盒 Dust box	集尘盒 Dust box	集尘盒 Dust box
主体材质 Main material	SUS304 t=5.0mm				



苏州通特洁净系统科技有限公司

Suzhou Tongte Clean System Technology Co., Ltd.

联系人：15021179111

linkman

邮 箱：3111486269@qq.com

e-mail

地 址：江苏省苏州市吴江区黎里镇金家坝滨河北路 79 号

Add: No.79 Binhe North Road, Jinjiaba, Lili Town, Wujiang District,
Suzhou City, Jiangsu Province

